Power your life

Valve Regulated Lead Acid Battery

WPL26-12N

Specifications

Nominal Voltage(V)

12V

Nominal Capacity

20 hour rate	(1.3A	to	10.50V)	26Ah
10 hour rate	(2.47A	to	10.50V)	24.7Ah
5 hour rate	(4.42A	to	10.20V)	22.1Ah
1C	(26A	to	9.60V)	16.47Ah
3C	(78A	to	9.60V)	10.4Ah

Weight

Approx. 8.8kg(19.4Lbs.)

Internal Resistance (at 1KHz)

Approx. 6.5 mΩ

Maximum Discharge Current for

5 seconds:390A

Charging Methods at 25℃(77℉)

Maximum Charging Current :	7.8A
Standby use:	
Float Charging Voltage	13.5 to 13.8V
Coefficient -3.0mV/℃/cell	

Operating Temperature Range

Charge	-15℃(5℉)	to	40℃(104℉)
Discharge	-15℃(5℉)	to	50℃(122℉)
Storage	-15℃(5℉)	to	40℃(104℉)

Charge Retention (shelf life) at 20℃(68℉)

1 month	97%
3 month	92%
6 month	85%

Case Material

ABS UL94 HB

Option: Flammability resistance of (UL94 V-0)

Design Life & Standard

EUROBAT(20℃) : 10/12 YEARS LONG LIFE

Terminal

F6

Dimensions

Length (L)	$166\pm^{2}_{1}$ ($6.54\pm^{0.08}_{0.04}$)
Width (W)	$175\pm^{2}_{1}$ ($6.89\pm^{0.08}_{0.04}$)
Height (H)	$125\pm^{2}_{1}$ ($4.92\pm^{0.08}_{0.04}$)
Overall Height (HT)	$125\pm^{2}_{1}$ ($4.92\pm^{0.08}_{0.04}$)

Description of torque value of hardware for the terminals:

Recommended torque value	M5:4 N-m (41kgf-cm)
Maximum allowable torque value	M5:6 N-m (61kgf-cm)

mm(inch)

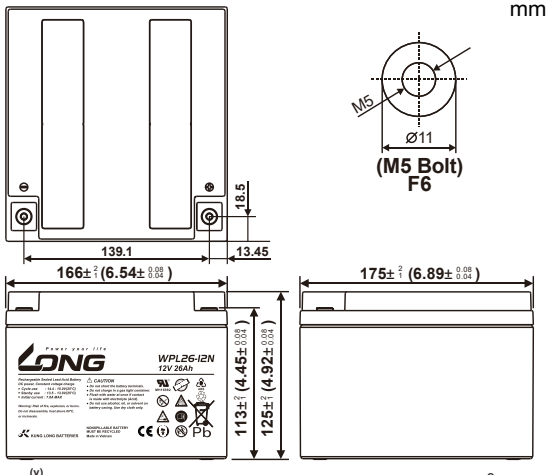

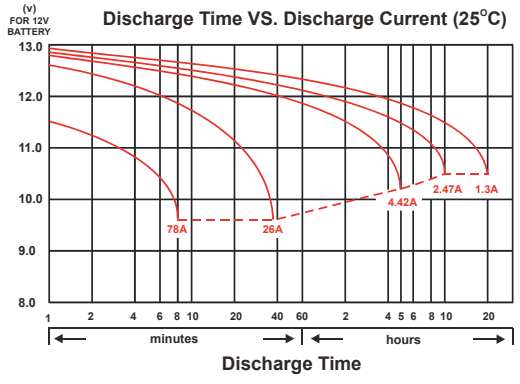

Power your life

Valve Regulated Lead Acid Battery

WPL26-12N

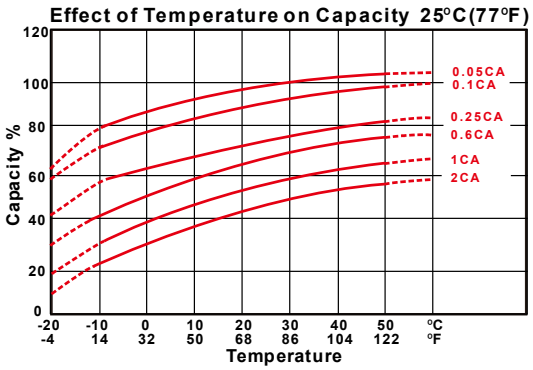

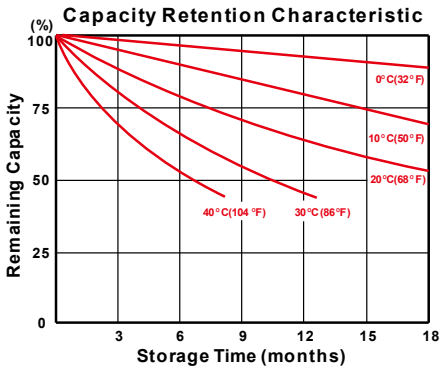

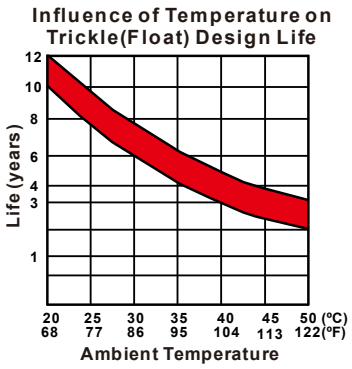

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25℃(77℉)

Time \ End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
15	min	85.0	96.5	100	102	103	104	105
30	min	53.3	62.5	64.0	65.0	65.8	66.3	66.8
45	min	39.5	47.0	47.5	47.8	48.0	48.1	48.2
60	min	31.8	37.0	37.3	37.5	37.6	37.7	37.8
120	min	17.8	19.7	20.0	20.2	20.3	20.4	20.5
180	min	12.3	13.1	13.5	13.6	13.7	13.8	13.8
240	min	9.32	10.3	10.5	10.6	10.7	10.8	10.8
300	min	7.78	8.44	8.55	8.59	8.62	8.64	8.65
360	min	6.70	7.19	7.25	7.28	7.30	7.31	7.32
480	min	5.35	5.69	5.73	5.75	5.76	5.77	5.77
600	min	4.45	4.75	4.85	4.87	4.88	4.89	4.90
1200	min	2.62	2.68	2.74	2.77	2.79	2.81	2.83

- Discharge Rates in Amperes to Various End Voltages at 25℃(77℉)

Time \ End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
15	min	40.8	47.0	49.5	51.5	53.0	53.5	54.0
30	min	25.3	30.0	31.0	31.7	32.2	32.7	33.0
45	min	18.8	22.3	23.0	23.4	23.6	23.8	24.0
60	min	15.0	17.5	17.8	18.0	18.2	18.4	18.5
120	min	8.30	9.22	9.35	9.45	9.53	9.61	9.68
180	min	5.75	6.13	6.50	6.65	6.68	6.71	6.73
240	min	4.50	4.90	5.00	5.10	5.15	5.18	5.20
300	min	3.75	4.00	4.20	4.35	4.45	4.48	4.50
360	min	3.25	3.47	3.52	3.55	3.57	3.59	3.60
480	min	2.60	2.75	2.78	2.83	2.86	2.88	2.90
600	min	2.20	2.40	2.60	2.62	2.63	2.64	2.65
1200	min	1.29	1.33	1.36	1.38	1.40	1.41	1.42

All data on the spec. sheet is an average value:
The tolerance range : X<6min(+15%~-15%), 6min≦X<10min(+12%~-12%),10min ≦X < 60min(+8% ~-8%), X≧60min(+5%~-5%)

190625-1E

廣隆光電科技股份有限公司
KUNG LONG BATTERIES INDUSTRIAL CO., LTD.

Head Quarter Service TEL: +886-49-2254-777 FAX: +886-49-2255-139 E-mail: sales@mail.klb.com.tw
USA Customer Service TEL: +1-949-328-7936 FAX: +1-949-266-9917 E-mail: sales@kunglong.com
Vietnam Customer Service TEL: +84-272-3779666 FAX: +84-272-3779476 E-mail: sales@mail.klb.com.tw

Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.