Power your life

Maintenance Free Motorcycle Batteries

WTZ5S-H

Specifications

Nominal Voltage(V)

12V

Nominal Capacity

10 hour rate	(0.45A	to	10.50V)	4.5Ah
5 hour rate	(0.765A	to	10.20V)	3.825Ah
1 C	(4.5A	to	9.60V)	2.025Ah
3 C	(13.5A	to	9.60V)	1.575Ah

Weight

Approx. 1.58kg(3.48Lbs.)

Internal Resistance (at 1KHz)

Approx. 16 mΩ

Cold Cranking Amperes (-17.8℃)

45A

High rate discharge characteristics (-10℃)

Discharge current (A)	30A
Duration (min)	1.8min
5 second voltage (V)	10.0V

Operating Temperature Range

Charge	-15℃(5℉)	to	40℃(104℉)
Discharge	-15℃(5℉)	to	50℃(122℉)
Storage	-15℃(5℉)	to	40℃(104℉)

Charge Retention (shelf life) at 20℃(68℉)

1 month	92%
3 month	90%
6 month	80%

Case Material

PP

Terminal Shape

Front	Side	Top
		

Dimensions

Length (L)	$113\pm^{2}_{1}(4.45\pm^{0.08}_{0.04})$
Width (W)	$70\pm^{2}_{1}(2.76\pm^{0.08}_{0.04})$
Height (H)	$85\pm^{2}_{1}(3.35\pm^{0.08}_{0.04})$
Overall Height (HT)	$85\pm^{2}_{1}(3.35\pm^{0.08}_{0.04})$

mm(inch)



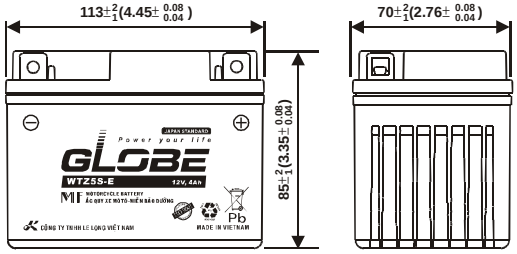

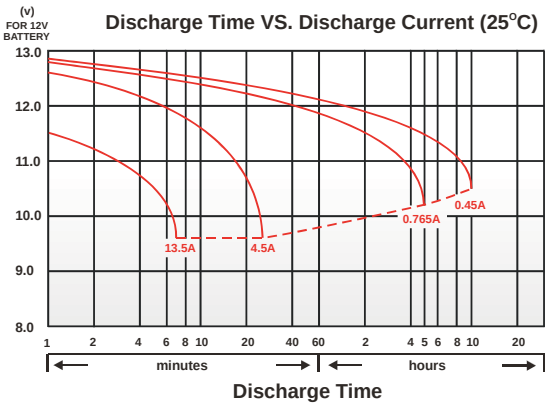

290318-1G-V

LE LONG VIETNAM CO., LTD.

CÔNG TY TNHH LELONG VIỆT NAM

I 40 Bà Chánh Thâu, KP2, Thị Trấn Bến Lức Huyện Bến Lức, Tỉnh Long An TEL:+84-272-3872213 FAX:+84-272-3872350

II Cụm Công Nghiệp Đức Mỹ, Xã Đức Hòa Đông, Huyện Đức Hòa, Tỉnh Long An TEL:+84-272-3779666 FAX:+84-272-3779476

Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.